


ÖLJYMÄÄRÄÄ MUUTETTU ALKUPERÄISESTÄ 24,685mL -> 23mL



LITHIUM



DISTANCE:	44 FEET	VOLUME:	23mL
RATIO:	9.15:1	FORWARD:	15,3mL
DROP BRUSH:		REVERSE:	7,7mL
TANKS:	TERRAIN	PUMP:	MULTI

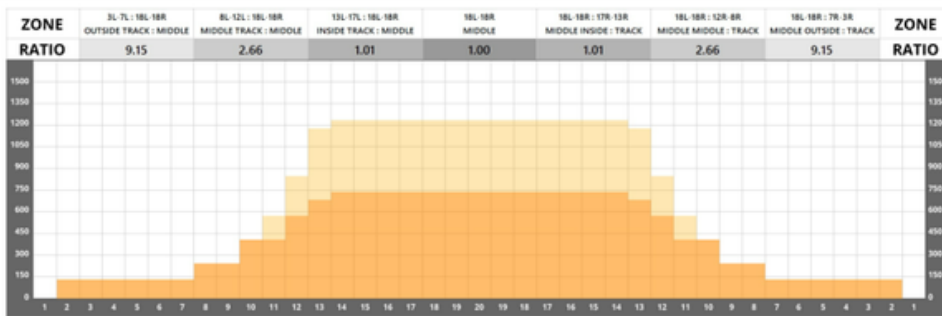

FORWARD LOADS DATA


#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	3	45	14	4		0 → 4	4,995
2	8L	8R	2	55	18	4		4 → 9	2,750
3	10L	10R	3	55	18	3		9 → 17	3,465
4	12L	12R	3	55	18	3		17 → 24	2,805
5	13L	13R	2	55	22	3		24 → 30	1,650
6	14L	14R	1	55	22	3		30 → 33	715
7	2L	2R	0	55	30	3		33 → 44	0

REVERSE LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	0	55	26	3		36 → 33	0
2	13L	13R	4	55	22	3		33 → 21	3,300
3	12L	12R	2	55	18	3		21 → 16	1,870
4	11L	11R	3	55	18	3		16 → 8	3,135
5	2L	2R	0	55	14	4		8 → 0	0

THIS PATTERN IS DESIGNED FOR:

VARIABLE BUFFER SPEEDS | VARIABLE MICROLITER STREAMS | DUAL CONDITIONING TANKS | REVERSE DROP BRUSH
 This pattern may require adjustments if using a lane machine that does not have these features

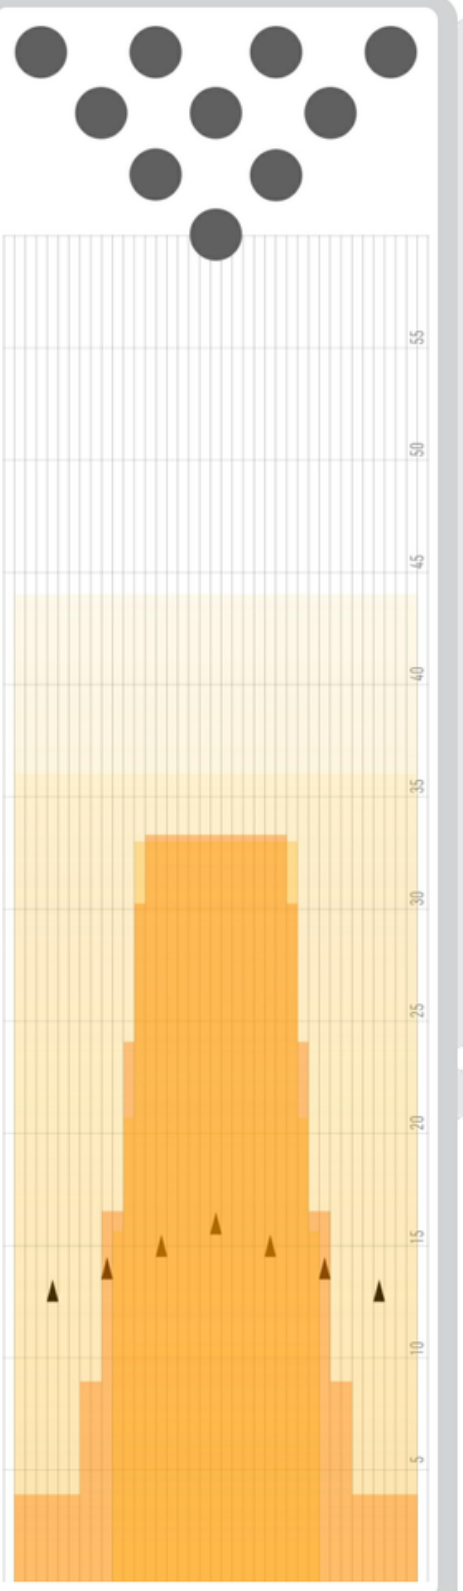

KEGEL PATTERN LIBRARY APP



PATTERNLIBRARY.KEGEL.NET



SCAN QR CODE TO
SHARE AND
DOWNLOAD
THIS PATTERN

